

KENT[®]
wood fires & heating



2023
WOOD FIRE
IDENTIFICATION GUIDE

CONTENTS

WOOD FIRE.....	1
CARDRONA	3
OXFORD.....	4
BENMORE.....	5
HAAST	6
MURCHISON	7
ASPIRING	8
FORBES.....	9
RUAPEHU.....	10
RATA INBUILT.....	11
LOGFIRE II INBUILT.....	12
TEKAPO.....	13
EUROFIRE.....	14
FLAMMA.....	15
SHERWOOD.....	16
SPECTRA.....	17
TILEFIREN/CA	18
KIWI RAD I & II.....	19
FIRENZE.....	20
SIGNATURE.....	21
QUANTUM.....	22
TUI RAD.....	23
KEA RAD	24
ASTRON	25
GENEVA.....	26
 WARRANTY POLICY	 27

CARDRONA WOOD FIRE

KWF295-6960

PARTS LIST

- KWF299-6151 - Bakelite Handle
- KWF299-6150 - Door Latch Assembly
- KWF299-6121 - Air Control Knob, Screw On
- KWF299-6324 - Door Glass 365W x 220H
- KWF299-6705 - Glass Retainer 396W x 251H Fits glass 370W x 224H
- KWF299-6240 - Door Glass tape 2m
- KWF299-6241 - Door Rope 2m
- KWF299-6903 - Air Tube - Top 27 holes 25 Ø x 492
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-6123 - Brick Pack x8, 4x 220x115x28, 2x 221x221x25, 2x 229x220x25
- KWF299-7189 - Brick Retainer 472W x 235H
- KWF299-6190 - Baffle 400W x 208H
- KWF299-7117 - Stove Bright Satin Black Spray Paint




SPECIFICATIONS


- Average emission Rate: 0.80/Kg
- Overall average efficiency :69%
- ECAN Authorization No.165498



INSTALLATION CLEARANCES

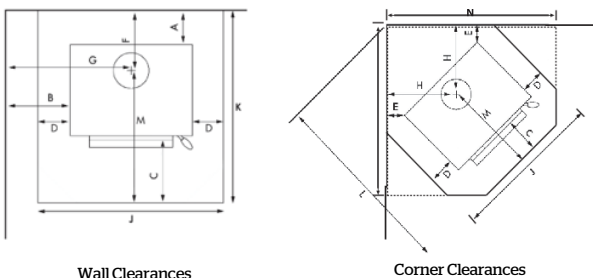

DIMENSIONS (MM)

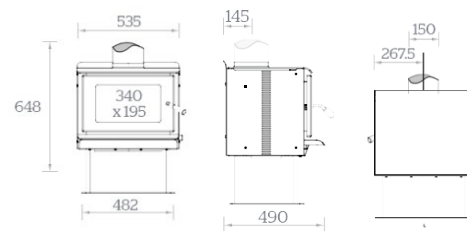

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
135	350	300	130	120	270	610	395	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



kent.co.nz



OXFORD WOOD FIRE

KWF295-6961

PARTS LIST


- K KWF299-6151 - Bakelite Handle
- KWF299-6150 - Door Latch Assembly
- KWF299-6121 - Air Control Knob, Screw On
- KWF299-6324 - Door Glass 365W x 220H
- KWF299-6705 - Glass Retainer 396W x 251H Fits glass 370W x 224H
- KWF299-6240 - Door Glass tape 2m
- KWF299-6241 - Door Rope 2m
- KWF299-6903 - Air Tube - Top 27 holes 25 Ø x 492
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-6123 - Brick Pack x8, 4x 220x115x28, 2x 221x221x25, 2x 229x220x25
- KWF299-7189 - Brick Retainer 472W x 235H
- KWF299-6190 - Baffle 400W x 208H
- KWF299-7117 - Stove Bright Satin Black Spray Paint
-




SPECIFICATIONS

- Average emission Rate: 0.80/Kg
- Overall average efficiency: 69%
- ECAN Authorization No 165500

INSTALLATION CLEARANCES

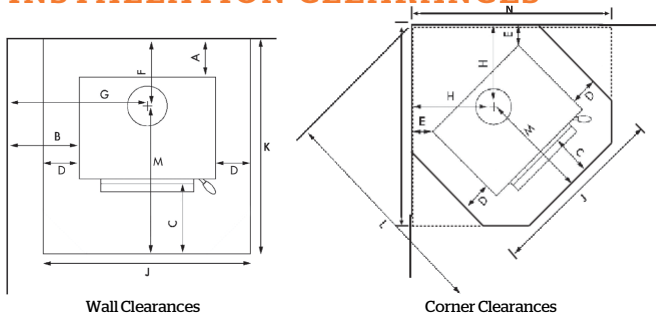

DIMENSIONS (MM)

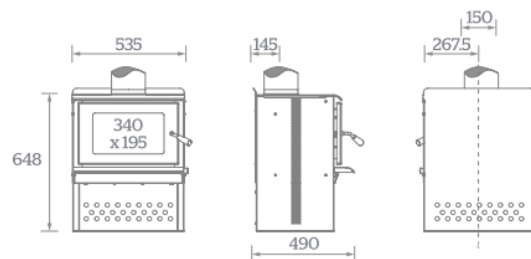

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
135	350	300	130	120	270	610	395	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.



Kent products are distributed by:
Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
Free Phone: 0800 161 161 | www.aberliving.co.nz

LOVED HERE.



kent.co.nz



BENMORE WOOD FIRE

KWF295-6962

PARTS LIST


- KWF299-6151 - Bakelite Handle
- KWF299-6150 - Door Latch Assembly
- KWF299-6121 - Air Control Knob, Screw On
- KWF299-6324 - Door Glass 365W x 220H
- KWF299-6705 - Glass Retainer 396W x 251H Fits glass 370W x 224H
- KWF299-6240 - Door Glass tape 2m
- KWF299-6241 - Door Rope 2m
- KWF299-6903 - Air Tube - Top 27 holes 25 Ø x 492
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-6123 - Brick Pack x8, 4x 220x115x28, 2x 221x221x25, 2x 229x220x25
- KWF299-7189 - Brick Retainer 472W x 235H
- KWF299-6190 - Baffle 400W x 208H
- KWF299-7117 - Stove Bright Satin Black Spray Paint



SPECIFICATIONS

- Average emission Rate: 0.80/Kg
- Overall average efficiency: 69%
- ECAN Authorization No. 165499


INSTALLATION CLEARANCES

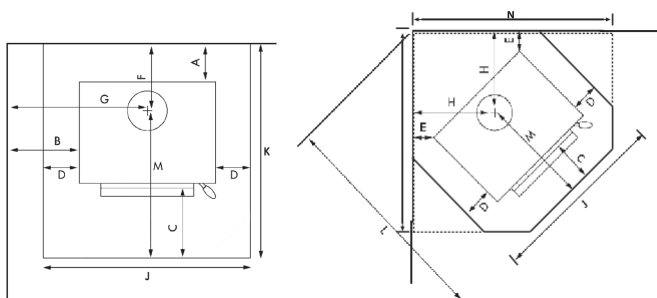

Wall Clearances

Corner Clearances

DIMENSIONS (MM)

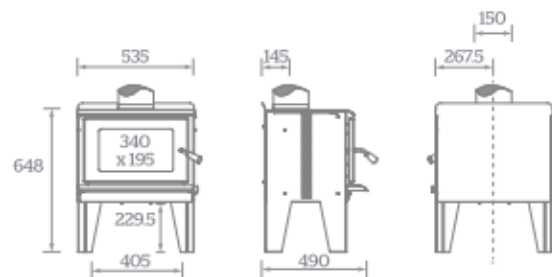

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
135	350	300	130	120	270	610	395	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



Kent products are distributed by:
Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
Free Phone: 0800 161 161 | www.aberliving.co.nz

kent.co.nz

HAAST WOOD FIRE

KWF295-6950

PARTS LIST


- KWF299-7112 - Composite Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7145 - Door Latch Assembly
- KWF299-7128 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248H
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-7089 - Brick Pack x6, 2x 240x190x25 Rear, 4x 245x177x25 Side
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint



SPECIFICATIONS

- Average emission rate: 0.98g/kg
- Overall average efficiency: 66%
- ECAN Authorization No. 144660


INSTALLATION CLEARANCES

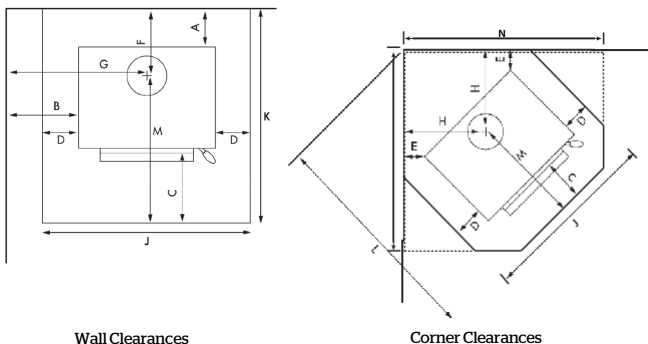

Wall Clearances

Corner Clearances

DIMENSIONS (MM)

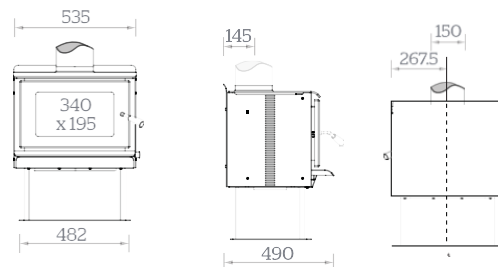

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
160	360	300	130	190	320	645	500	835	960	1340	640	1160

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



MURCHISON WOOD FIRE

KWF295-6952

PARTS LIST


- KWF299-7112 - Composite Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7145 - Door Latch Assembly
- KWF299-7128 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248H
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-7089 - Brick Pack x6, 2x 240x190x25 Rear, 4x 245x177x25 Side
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint




SPECIFICATIONS

- Average emission rate: 0.98g/kg
- Overall average efficiency: 66%
- ECAN Authorization No: 14466

INSTALLATION CLEARANCES

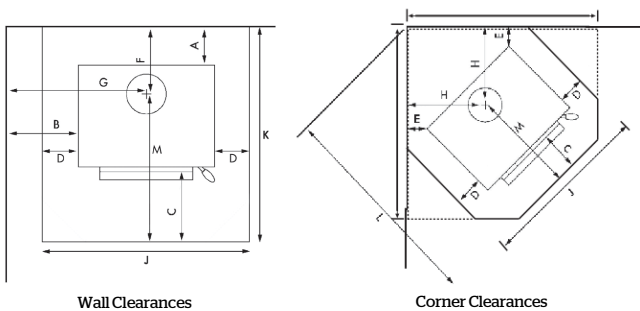

DIMENSIONS (MM)

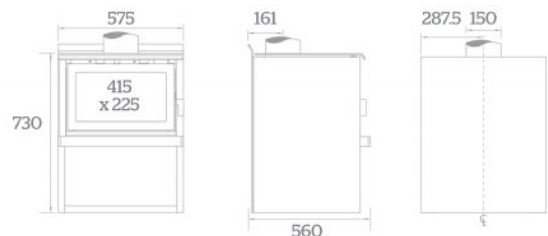

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
160	360	300	130	190	320	645	500	835	960	1340	640	1160

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS 2918 Appendix F report no O2/649

LOVED HERE.



kent.co.nz

ASPIRING WOOD FIRE

KWF295-6951

PARTS LIST


- KWF299-7112 - Composite Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7145 - Door Latch Assembly
- KWF299-7128 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248H
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-7089 - Brick Pack x6, 2x 240x190x25 Rear, 4x 245x177x25 Side
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint




SPECIFICATIONS

- Average emission rate: 0.98g/kg
- Overall average efficiency: 66%
- ECAN Authorization No. 144661

INSTALLATION CLEARANCES

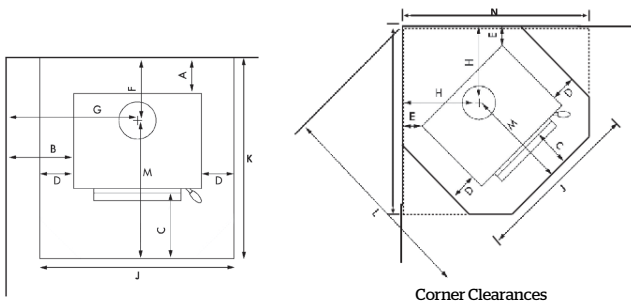

DIMENSIONS (MM)

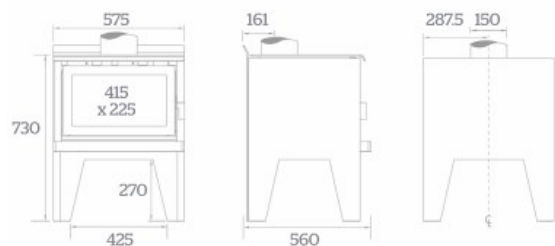

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
160	360	300	130	190	320	645	500	835	960	1340	640	1160

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.



FORBES WOOD FIRE

KWF295-6964

PARTS LIST


- KWF299-7112 - Composite Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7145 - Door Latch Assembly
- KWF299-7128 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248H
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-7089 - Brick Pack x6, 2x 240x190x25 Rear, 4x 245x177x25 Side
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint



SPECIFICATIONS


- Average emission rate: 0.98g/kg
- Overall average efficiency: 66%
- ECAN Authorization No. 181319

INSTALLATION CLEARANCES

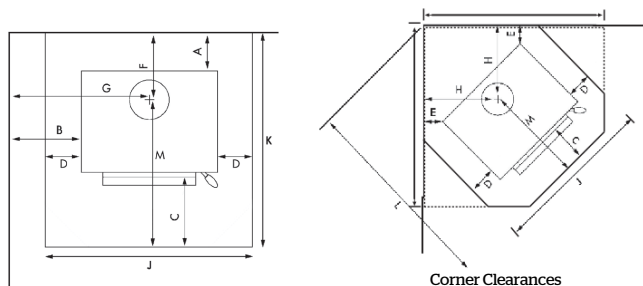

Minimum Installation Clearances (with flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
300	200	300	80	180	460	488	500	735	1100	1340	640	1160

DIMENSIONS (MM)

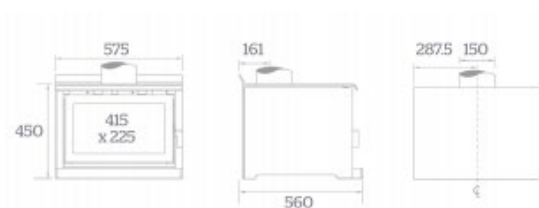

RECOMMENDED FLUE KITS

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no.02/649.

LOVED HERE.



kent.co.nz

RUAPEHU WOOD FIRE

KWF295-6965

PARTS LIST

- KWF299-6151 - Bakelite Handle
- KWF299-6150 - Door Latch Assembly
- KWF299-7114 - Composite Air slide Handle
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-7235 - Air Tube
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-7324 - Brick Pack x7, 2x 150x234x25, 5x 150x160x25
- KWF299-7233 - Baffle 640W x 640H
- KWF299-7117 - Stove Bright Satin Black Spray Paint




SPECIFICATIONS

- Average emission rate: 0.54g/kg
- Overall average efficiency: 66%
- ECAN Authorization No. 191312




INSTALLATION CLEARANCES

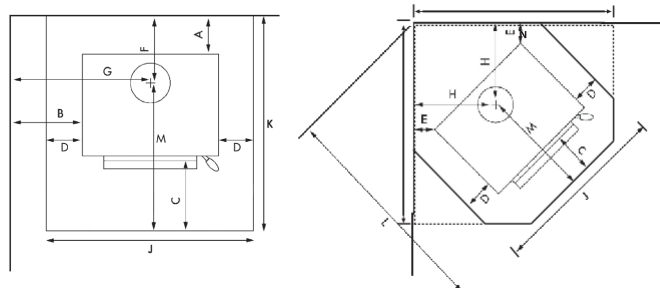

Wall Clearances

Corner Clearances

DIMENSIONS (MM)

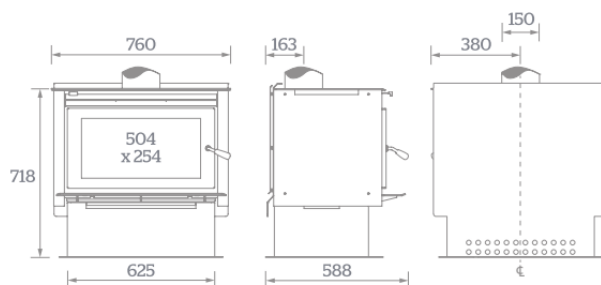

RECOMMENDED FLUE KITS

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no.02/649.

LOVED HERE.



kent.co.nz

RATA INBUILT WOOD FIRE

KWF295-6938

PARTS LIST


- KWF299-7113 - Composite Handle
- KWF299-6205 - Fiber Washer Set for Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7129 - Door Latch Assembly
- KWF299-7127 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-7040 - Brick Pack x6, 2x 205x176x25, 4x 180x176x25
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H*
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint




SPECIFICATIONS

- Average emission rate: 0.51g/kg
- Overall average efficiency: 69%
- ECAN Authorization No. 142831

INSTALLATION CLEARANCES

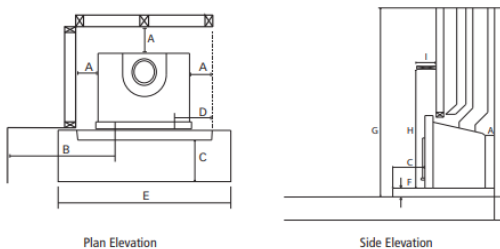

DIMENSIONS (MM)

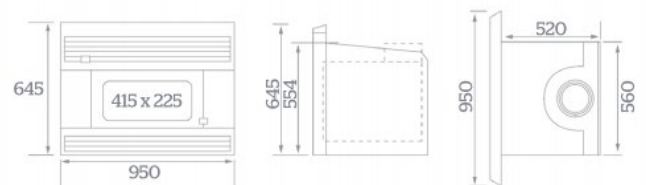

Minimum Installation Clearances (mm)								Maximum Installation Clearances (mm)
A	B	C*	D	E	F**	G	H	I
25	500	300	200	840	59	2000	1200	160

RECOMMENDED FLUE KITS

Inbuilt Flue Kit (For Masonry Installation)	KWF298-6025
Zero Clearance Box + 600mm transition only	KWF298-7371
Zero Clearance Box + Flue 3.6m	KWF298-7374

Flue kits including Zero Clearance Box tested to AS/NZS2918 Appendix B report no. 0336. Components tested to Appendix F report number 16/2801.

* Floor protector from front of fascia.

** Heat sensitive floors only. Refer installation instructions for other floor types.

LOVED HERE.



kent.co.nz

LOGFIRE II INBUILT WOOD FIRE

KWF295-6937

PARTS LIST


- KWF299-7113 - Composite Handle
- KWF299-6205 - Fiber Washer Set for Handle
- KWF299-7114 - Composite Air slide Handle
- KWF299-7129 - Door Latch Assembly
- KWF299-7127 - Rural Air Slide
- KWF299-6737 - Door Glass 440W x 248H
- KWF299-6910 - Glass Retainer 450W x 267H Fits glass 440W x 248
- KWF299-6240 - Door Glass Tape 2M
- KWF299-6241 - Door Seal Rope 2M
- KWF299-6905 - Air Tube - Top Front 20 holes 25 Ø x 446L
- KWF299-6906 - Air Tube - Top Rear 12 Holes 25 Ø x 446L
- KWF299-6257 - Air Tube Spacer For 25mm Air Tubes
- KWF299-6900 - Air Tube Split Pin
- KWF299-7040 - Brick Pack x6, 2x 205x176x25, 4x 180x176x25
- KWF299-7118 - Brick Retainer (U Shape) 427W x 180H*
- KWF299-7043 - Baffle 400W x 208H
- KWF299-6141 - Baffle Brick Pack 2x 180 x 270 x 15mm
- KWF299-7117 - Stove Bright Satin Black Spray Paint



SPECIFICATIONS

- Average emission rate: 0.51g/kg
- Overall average efficiency: 69%
- ECAN Authorization No. 142832

INSTALLATION CLEARANCES

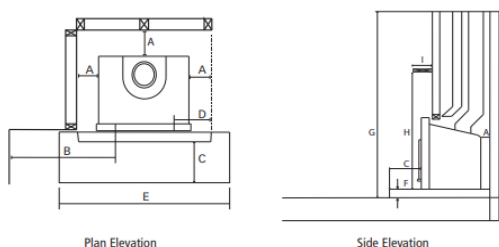

DIMENSIONS (MM)



Minimum Installation Clearances (mm)							Maximum Installation Clearances (mm)	
A	B	C*	D	E	F**	G	H	I
25	500	300	200	840	59	2000	1200	160

Inbuilt Flue Kit (For Masonry Installation)	KWF298-6025
Zero Clearance Box + 600mm transition only	KWF298-7371
Zero Clearance Box + Flue 3.6m	KWF298-7374

Flue kits including Zero Clearance Box tested to AS/NZS2918 Appendix B report no. 0336. Components tested to Appendix F report number 16/2801.

* Floor protector from front of fascia.

** Heat sensitive floors only. Refer installation instructions for other floor types.

LOVED HERE.



kent.co.nz




TEKAPO

OUTDOOR WOOD FIRE

KWF295-5901



- Overall average efficiency: 69%
- ECAN Authorization No.142832

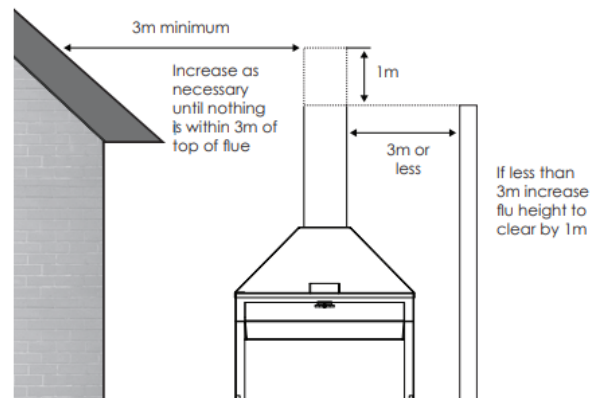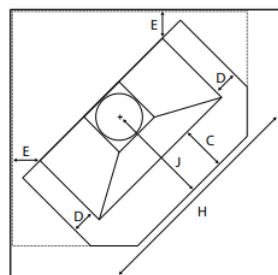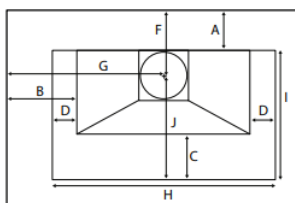

Minimum Installation Clearances(mm)

A	B	C	D	E	F	G	H	I	J
300	1000	500	200	300	484	1470	1340	950	826

LOVED HERE.



kent.co.nz

EUROFIRE WOOD FIRE DISCONTINUED MODEL


PARTS LIST

- KWF299-6735 - KENT Door Glass 390W x 225H
- KWF299-6249 - KENT Glass Retainer 407W x 247H Fits glass 380W x 225H
- KWF299-6446 - KENT Glass Retainer 407W x 252H Fits glass 395W x 225H (1997-2002)
- KWF299-6240 - KENT tape
- KWF299-6241 - KENT rope
- KWF299-6436 - KENT Air Tube - Top 16 holes 23 Ø x 435
- KWF299-6289 - KENT Air Tube Spacer For 23mm Air Tubes
- KWF299-6900 - KENT Air Tube Split Pin
- KWF299-6101 - KENT Brick Pack 7x 262X115X25
- KWF299-6191 - KENT Baffle 396W x 230H
- KWF299-7117 - KENT Stove Bright Satin Black Spray Paint




SPECIFICATIONS


- Model shown is from between 1997 and 2002
- 3mm Firebox construction
- Prior to 1997 the air slide arrangement was different - manual slide not rotary control.
- Door was flat and not sloped as this one is, and door handle was as per Fig.1
- Firebricks, Roof baffles and secondary air tubes are the same in Fiorenzi and Fiamma Models
- Came in various colours, Matt Black, Green, Brown, Matt Brown and white

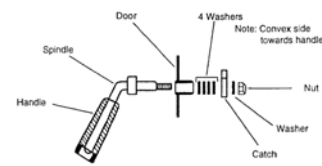

INSTALLATION CLEARANCES

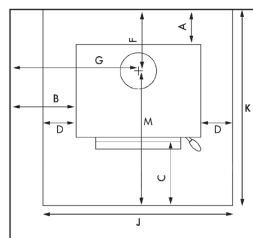


Wall Clearances

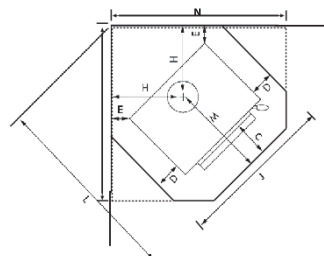

Corner Clearances

DIMENSIONS (MM)

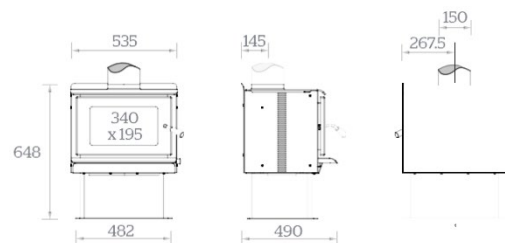

RECOMMENDED FLUE KITS

Minimum Installation Clearances (with flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
135	350	300	130	120	270	610	395	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

FluekitsarettestedtoAS/NZS2918AppendixFreportnoO2/649

LOVED HERE.



kent.co.nz

FIAMMA / FIORENZI WOOD FIRE DISCONTINUED MODEL

PARTS LIST


- KWF299-6101 - KENT Brick pack: fiorenzi fiamma euro
- KWF299-6117 - KENT Door handle knob black
- KWF299-6198 - KENT Air control knob
- KWF299-6735 - KENT Door glass 390x225
- KWF299-6446 - KENT Glass retainer
- KWF299-6273 - KENT Glass retainer clip for pre 97
- KWF299-6240 - KENT Door glass tape 2m
- KWF299-6241 - KENT Door rope 2m
- KWF299-6436 - KENT Airtubes
- KWF299-6289 - KENT Airtube spacer
- KWF299-6900 - KENT Split Pin
- KWF299-6291 - KENT Baffle

SPECIFICATIONS


- Model shown is from between 1997 and 2002
- 3mm Firebox construction
- Prior to 1997 the air slide arrangement was different - manual slide not rotary control.
- Door was flat and not sloped as this one is, and door handle was as per Fig.1
- Firebricks, Roof baffles and secondary air tubes are the same in Fiorenzi and Eurofire Models
- Came in colours, Matt Black, Green, Brown, Matt Brown and white




INSTALLATION CLEARANCES

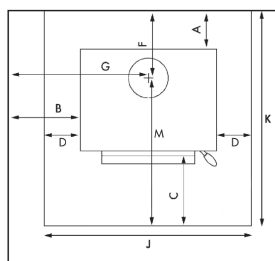

Wall Clearances

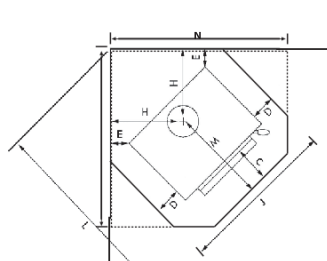

Corner Clearances

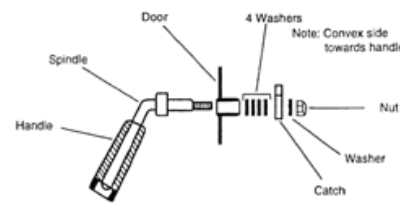

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
375	300	200	300	225	450	530	465	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649

LOVED HERE.



kent.co.nz

SHERWOOD WOOD FIRE DISCONTINUED MODEL

PARTS LIST


- KWF299-6121 KENT Air control knob pre 97
- KWF299-6249 KENT Glass retainer wide door pre 97
- KWF299-6273 KENT Glass retainer clip for pre 97
- KWF299-6240 KENT Door glass tape 2m
- KWF299-6241 KENT Door rope 2m
- KWF299-6906 KENT Air tube 12 holes 446l x 25 ø
- KWF299-6257 KENT Airtube spacer suit
- KWF299-800 - KENT Pin
- KWF299-6100 KENT Brick pack
- KWF299-6271 KENT Baffle

SPECIFICATIONS

- Model shown is from between 1993 and 2003
- Cast Iron Door with Gold trim.
- Solid steel Top Panel all Hi Temp painted panels
- Apart from enamelled Ash Spill Tray and powder coated plinth base and border.
- Door was flat.
- Firebricks, Roof Baffles and Secondary air tubes are the same as the Tilefire and Logfire Non-CA Models



INSTALLATION CLEARANCES

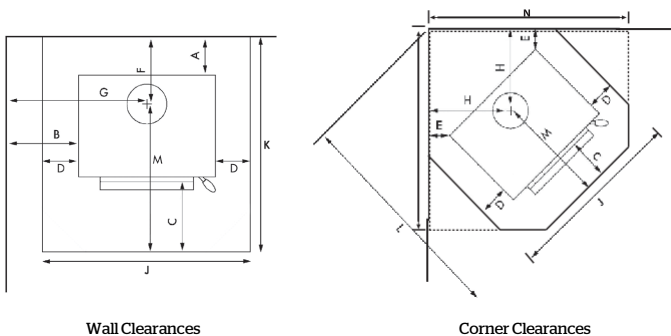

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
475	550	540	130	425	640	805	730	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

FluekitsarettestedtoAS/NZS2918AppendixFreportnoO2/649.

LOVED HERE.



SPECTRA WOOD FIRE DISCONTINUED MODEL

PARTS LIST


- KWF299-6121 KENT Air control knob pre 97
 - KWF299-6736 KENT Door glass pre 1997
 - KWF299-6196 KENT Spectra glass retainer pre 97
 - KWF299-6273 KENT Glass retainer clip for pre 97
 - KWF299-6240 KENT Door glass tape 2m
 - KWF299-6241 KENT Door rope 2m
 - KWF299-6183 KENT Airtube spectra
 - KWF299-6102 KENT Brick pack for spectra 1997 98
 - KWF299-6183
- Specific Spectra CA Parts (In addition to above)
- KWF299-6198 KENT Air control knob blk 97
 - KWF299-6117 KENT Door handle knob black
 - KWF299-6996 1990-2002
 - KWF299-6445 KENT Glass retainer



SPECIFICATIONS

- Model shown is from between 1997 and 2002
- Prior to 1997 the air slide arrangement was different - Manual slide not rotary control.
- Door was flat and not sloped as this one is.
- Firebricks, Roof Baffles and Secondary air tubes are the same in both models.
- Door Glass and retaining method changed between models.
- Large range of colours, Gloss Black, Matt Black, Green, Brown, Matt Brown and White - shown here.
- Kent LOGGER was based on this firebox during 1993-1995 as a radiant model without outer enamelled panels

INSTALLATION CLEARANCES

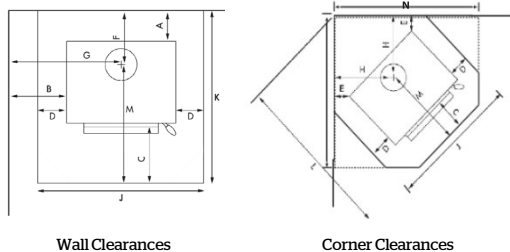

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
475	550	540	130	425	640	805	730	795	855	1140	585	1000

RECOMMENDED FLUE KITS

Standard	KWF298-7005
Energy Saver	KWF298-7006

Fluekits are tested to AS/NZS2918 Appendix Freportno O2/649.

LOVED HERE.





TILEFIRE N/CA

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST

- KWF299-6198 KENT Air control knob
- KWF299-7033 KENT Door latch assembly
- KWF299-6735 KENT Glass 390 X 225mm
- KWF299-6249 KENT Glass retainer 407 x 252mm
- KWF299-6240 KENT Door glass tape 2m
- KWF299-6241 KENT Door rope 2m
- KWF299-6906 KENT Front air tube 12 holes 446L X 25 Ø
- KWF299-6257 KENT Airtube spacer suit
- KWF299-6900 - Pin
- KWF299-6100 KENT Brick pack
- KWF299-6169 KENT Front baffle 426 X 200 mm
- KWF299-6170 KENT Rear upper baffle 428 X 210mm
- KWF299-7026 KENT black tile 20 x 200mm




SPECIFICATIONS

- Model shown is from between 1997 and Current
- Prior to 1997 the air slide arrangement was different - Manual slide not rotary control.
- Door was flat and not sloped as this one is.
- Firebricks, Roof Baffles and Secondary air tubes are the same in both models.
- Door Glass and retaining method changed between models.



INSTALLATION CLEARANCES

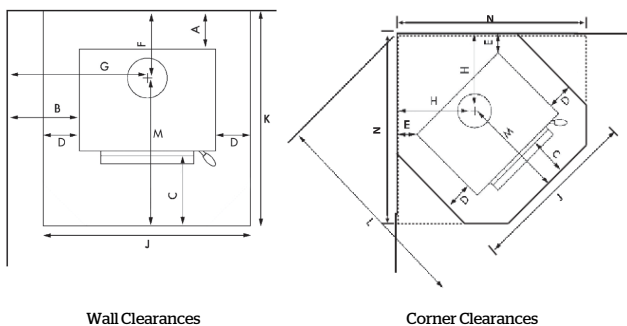

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
375	300	200	300	225	450	530	465	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



Kent products are distributed by:
 Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
 Free Phone: 0800 161 161 | www.aberliving.co.nz

kent.co.nz



KIWRAD I & II

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST

- KWF299-6121 KENT Air control knob pre 97
- KWF299-6324 - Glass
- KWF299-6249 KENT Glass retainer wide door pre 97
- KWF299-6273 KENT Glass retainer clip for pre 97
- KWF299-6240 KENT Door glass tape 2m
- KWF299-6241 KENT Door rope 2m
- KWF299-6906 KENT Air tube 12 holes 446l x 25 ø
- KWF299-6257 KENT Airtube spacer suit
- KWF299-6100 KENT Brick pack
- KWF299-6271 KENT Baffle
- KWF299-6705

SPECIFICATIONS

- Model shown in fig1 is from between 2003 and 2005 and is the non-clean air version.
- This model was superseded in 2005 with the MAX version fig2 of the fire.
- At the time of the changeover extra air tubes were added and side panels added to cover up the air intakes.
- The air intake was also moved below the Ash Spill Tray



10kW


150m²

Radiant

Clean Air

VERMELDTE
FIREBOX
15
YEAR
WARRANTY

INSTALLATION CLEARANCES

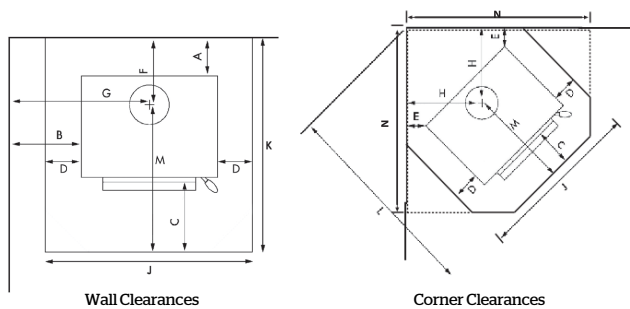

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
375	300	200	300	225	450	530	465	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no. 02/649

LOVED HERE.



Kent products are distributed by:
 Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
 Free Phone: 0800 161 161 | www.aberliving.co.nz

kent.co.nz

FIRENZE

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST

- KWF299-6449 Door Latch
- KWF299-6704 Door Latch Spindle
- KWF299-6324 Door Glass 365 x 220mm
- KWF299-6705 Glass Retainer 396 x 251
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6903 Air Tube Top 27 Holes 25 Ø x 492mm
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-6122 Brick Pack 12x 220x115x28mm
- KWF299-6816 Brick Retainer 477 x 180mm
- KWF299-6190 Baffle Plate 400 x 208mm
- KWF299-6176 Baffle Plate 470 x 210mm (2002-2005)
- KWF299-7024 Metallic Black Spray Paint




SPECIFICATIONS

- Not to be confused with the Fiorenzi models from 1990 to 2001
- Model shown is from between 2002 and 2005
- This model was superseded in 2005 with the MAX version of the fire.
- At the time of the changeover extra air tubes were added the air intake was moved below the Ash Spill Tray



INSTALLATION CLEARANCES

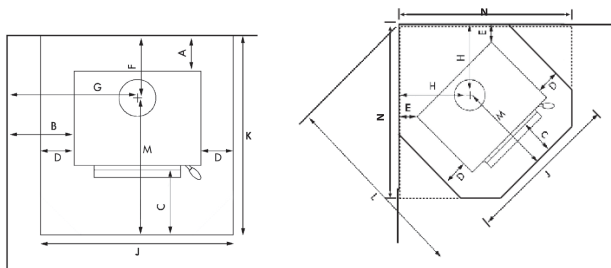

Wall Clearances

Corner Clearances

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
375	300	200	300	225	450	530	465	795	855	1140	585	1000

RECOMMENDED FLUE KITS

Standard	KWF298-7005
Energy Saver	KWF298-7006

Fluekits are tested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



kent.co.nz



SIGNATURE WOOD FIRE DISCONTINUED MODEL

PARTS LIST

- KWF299-7077 Door Handle
- KWF299-6121 Air Control Knob (screw on Pre 1997)
- KWF299-6449 Door Latch
- KWF299-6704 Door Black Spindle
- KWF266-6325 Door Glass 465 x 220mm
- KWF299-6706 Glass Retainer 495 x 250mm
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6908 Air Tube Top 20 Holes 25 Ø x 600L
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-7193 Brick Pack 7x 220x115x28mm 2x 220x115x28 (corner cut)
- KWF299-7041 Brick Retainer 572 x 200mm
- KWF299-6175 Baffle Plate 570 x 175mm
- KWF299-6189 Baffle Plate 495 x 190mm (signature max only)
- KWF299-7024 Metallic Spray Paint




SPECIFICATIONS

- Average emission rate: 0.85g/kg
- Overall average efficiency: 71.34%
- ECAN Authorization No. 111733



INSTALLATION CLEARANCES

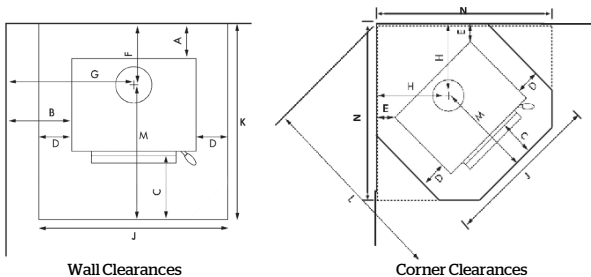

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
100	250	300	90	50	245	600	400	880	805	1120	560	1140

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are retested to AS/NZS2918 Appendix F report no O2/649.

LOVED HERE.



Kent products are distributed by:
Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
Free Phone: 0800 161 161 | www.aberliving.co.nz

kent.co.nz

QUANTUM WOOD FIRE DISCONTINUED MODEL

PARTS LIST

- KWF299-7077 Door Handle
- KWF299-7076 Air Knob
- KWF299-6449 Door Latch
- KWF299-6704 Door Black Spindle
- KWF299-7085 Air Slide Rod
- KWF266-6325 Door Glass 465 x 220mm
- KWF299-6706 Glass Retainer 495 x 250mm
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6907 Air Tube Top 19 Holes 25 Ø x 446L
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-6122 Brick Pack 12x 220x115x28mm
- KWF299-6177 Baffle Plate 529 x 157mm
- KWF299-7024 Metallic Spray Paint




SPECIFICATIONS

- Average emission rate: 0.54g/kg
- Overall average efficiency: 68.7%
- ECAN Authorization No. 121974



INSTALLATION CLEARANCES

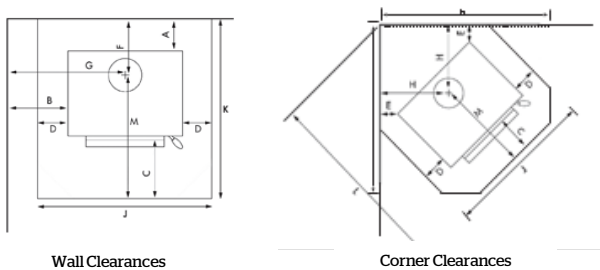

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)					
A	B	C	D	E	F	G	H	J	K	L	M	N
100	300	300	80	50	260	642	440	845	940	1300	680	1100

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649



TUIRAD
WOOD FIRE
DISCONTINUED MODEL

PARTS LIST

- KWF299-7077 Door Handle
- KWF299-6121 Air Control Knob (screw on Pre 1997)
- KWF299-7076 Air Knob
- KWF299-6449 Door Latch
- KWF299-6704 Door Black Spindle
- KWF299-7032 Door Glass 415 x 215mm
- KWF299-6196 Glass Retainer 447 x 252mm
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6986 Air Tube Rear 25 Ø x530L

SPECIFICATIONS

- Overall average efficiency: 71%
- ECAN Authorization No. 111269





16kW



200m²



Radiant




Clean Air



VERMICULITE
FIREBOX
15
YEAR
WARRANTY

INSTALLATION CLEARANCES

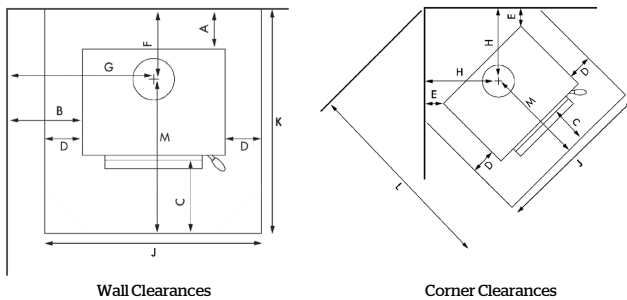

Wall Clearances

Corner Clearances

Minimum Installation Clearances (no flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
100	400	300	155	200	250	690	512	840	800	1275	550	1110

RECOMMENDED FLUE KITS

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no. O2/649

LOVED HERE.



kent.co.nz



Kent products are distributed by:
Aber Holdings Ltd T/A Aber Living, 17 Mainstreet Place, Te Rapa, Hamilton 3200
Free Phone: 0800 161 161 | www.aberliving.co.nz

KEA RAD

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST

- KWF299-6121 Air Control Knob (screw on)
- KWF299-6449 Door Latch
- KWF299-6704 Door Black Spindle
- KWF299-6324 Door Glass 365 x 220mm
- KWF299-6705 Glass Retainer 396 x 251mm
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6903 Air Tube Top 27 Holes 25 Ø x 492mm
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-6122 Brick Pack 12x 220x115x28mm
- KWF299-6816 Brick Retainer 477 x 180mm
- KWF299-6190 Baffle Plate 400 x 208mm
- KWF299-7024 Metallic Black Spray Paint




SPECIFICATIONS


- Average emission rate: 0.8g/kg
- Overall average efficiency: 69%
- ECAN Authorization No. 110613



INSTALLATION CLEARANCES

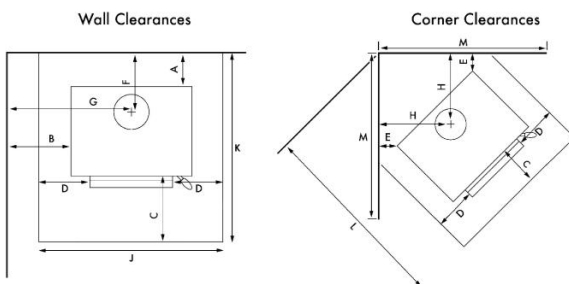

DIMENSIONS (MM)

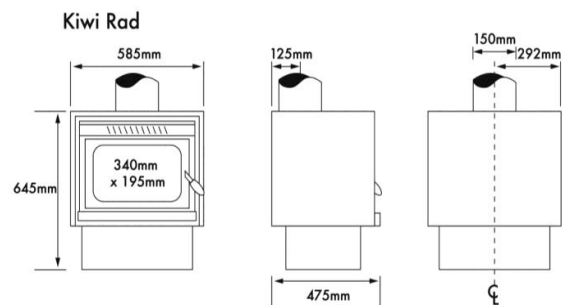

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm								Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M	N
375	300	200	300	225	450	530	465	795	855	1140	585	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no O2/649

LOVED HERE.



kent.co.nz

ASTRON

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST


- KWF299-6449 Door Latch
- KWF299-6704 Door Latch Spindle
- KWF299-6324 Door Glass 365 x 220mm
- KWF299-6705 Glass Retainer 396 x 251
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6903 Air Tube Top 27 Holes 25 Ø x 492mm
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-6122 Brick Pack 12x 220x115x28mm
- KWF299-6816 Brick Retainer 477 x 180mm
- KWF299-6176 Baffle Plate 470 x 210mm (2002-2005)
- KWF299-6190 Baffle Plate 400 x 208mm
- KWF299-7024 Metallic Black Spray Paint




SPECIFICATIONS

- Average emission rate: 0.70g/kg
- Overall average efficiency: 71.30%
- ECAN Authorization No. 110612

INSTALLATION CLEARANCES

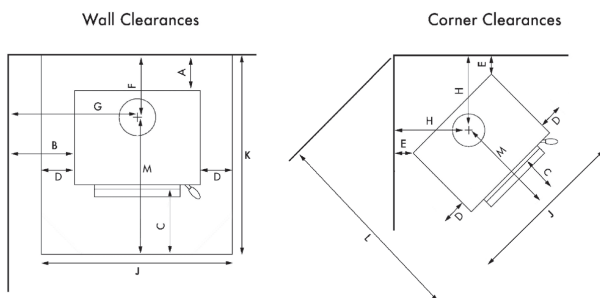

DIMENSIONS (MM)

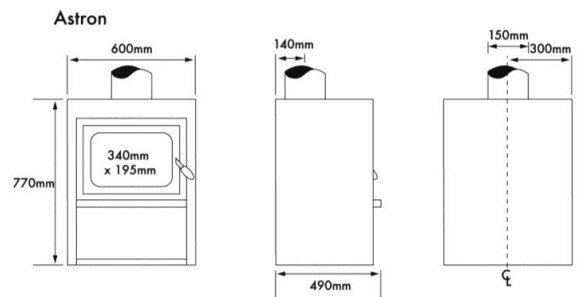

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm							Hearth Clearances (mm)				
A	B	C	D	E	F	G	H	J	K	L	M
100	225	300	90	50	235	525	360	780	820	1085	585

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no.02/649.

LOVED HERE.



kent.co.nz

GENEVA

WOOD FIRE

DISCONTINUED MODEL

PARTS LIST

- KWF299-6449 Door Latch
- KWF299-6704 Door Latch Spindle
- KWF299-6324 Door Glass 365 x 220mm
- KWF299-6705 Glass Retainer 396 x 251
- KWF299-6240 Door Glass Tape 2m
- KWF299-6241 Door Seal Rope 2m
- KWF299-6903 Air Tube Top 27 Holes 25 Ø x 492mm
- KWF299-6257 Air Tube Spacer 25 Ø mm
- KWF299-6122 Brick Pack 12x 220x115x28mm
- KWF299-6816 Brick Retainer 477 x 180mm
- KWF299-6190 Baffle Plate 400 x 208mm
- KWF299-7024 Metallic Black Spray Paint




SPECIFICATIONS


- Average emission rate: 1.09g/kg
- Overall average efficiency 65.04%
- NCC Authorization No. N0032



INSTALLATION CLEARANCES

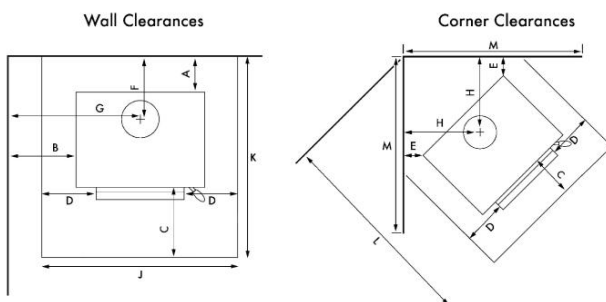

DIMENSIONS (MM)

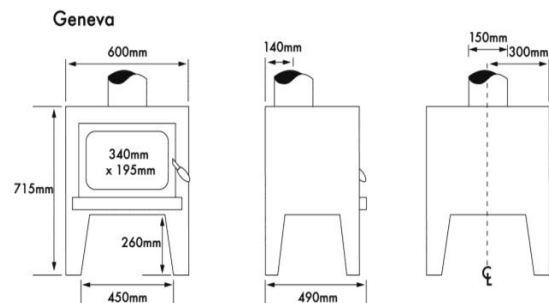

RECOMMENDED FLUE KITS

Minimum Installation Clearances (no flue shield) mm								Hearth Clearances (mm)			
A	B	C	D	E	F	G	H	J	K	L	M
100	225	330	200	50	235	525	365	880	890	1117	1000

Standard	KWF298-7005
Energy Saver	KWF298-7006

Flue kits are tested to AS/NZS2918 Appendix F report no. 02/649.

LOVED HERE.



kent.co.nz

WARRANTY POLICY

WARRANTY TERMS & CONDITIONS

Kent agrees to replace, or repair as necessary any part of the appliance, which is proven at the time of delivery, or within the warranty periods shown below to be defective through faulty materials or workmanship.

This warranty is for normal domestic use. Your Kent wood fire is warranted for up to 15 years, with the exception of the following parts; door glass, door and glass seals, fire bricks, flue, secondary air systems and baffle plates, which all have a 12 month (part only) warranty.

The warranty does not cover damage or failure due to incorrect or faulty installation, misuse, negligence, water damage, burning improper fuel or environmental conditions. Any unauthorised alteration, modification or substitution of any part of this appliance or use of this appliance not in accordance with the instructions supplied, will render this warranty void.

Your kent wood fire must be serviced annually and a complete service history must be maintained showing flue cleaning and component servicing, failure to do so can void any warranty claim.

Your Kent wood fire must be installed in accordance with the manufacturer's instructions and with the appropriate approved flue system. Installation must comply with applicable standards, regulations and local by-laws. Failure to do so will void any warranty offered in its entirety.

If the appliance needs repair and is installed outside the normal service area (25km) of the nearest authorised service agent the purchaser is responsible for any additional expenses incurred. In the event that an appliance needs to be replaced, the warranty does not extend to any consequential materials required or additional expenses incurred.

In the event of a whistling air tube caused due to environmental circumstances, Aber living will replace the air tube. The warranty does not extend to related installation, labour or travel costs.

All claims against the warranty must be directed in the first instance to the store of purchase. Any repairs undertaken without the manufacturers authority will invalidate this warranty.

In order to claim on the warranty, you will need to supply; proof of purchase, installation, servicing details and a completed warranty form (below).

Your Kent wood fire warranty is transferable on the sale of the home where the wood fire is installed. Nothing in this warranty is intended to limit any conditions of the warranty right or remedy pursuant to the consumer guarantee act 1993, except to the extent permitted under the act. Your Kent wood fire is intended for domestic use only and the warranty is not valid for wood fires to be used for business purposes. Kent reserves the right to alter or amend specifications or designs of its product without prior notice.

LOVED HERE.



KENT[®]
wood fires & heating



Kent products are distributed by:
 Aber Holdings Ltd T/A Aber Living,
 17 Mainstreet Place, Te Rapa, Hamilton
 Free Phone: 0800 161 161
 Free Fax: 0800 163 163
www.aberliving.co.nz



Product specifications are applied at date of publication and can be changed without notice. Fire install photographs should not be used as installation guideline

LOVED HERE.

